


## 15-2143 Removing and installing camshaft position sensor

Operation No. of operation texts and work units or standard texts  
and flat rates:  
15-2143

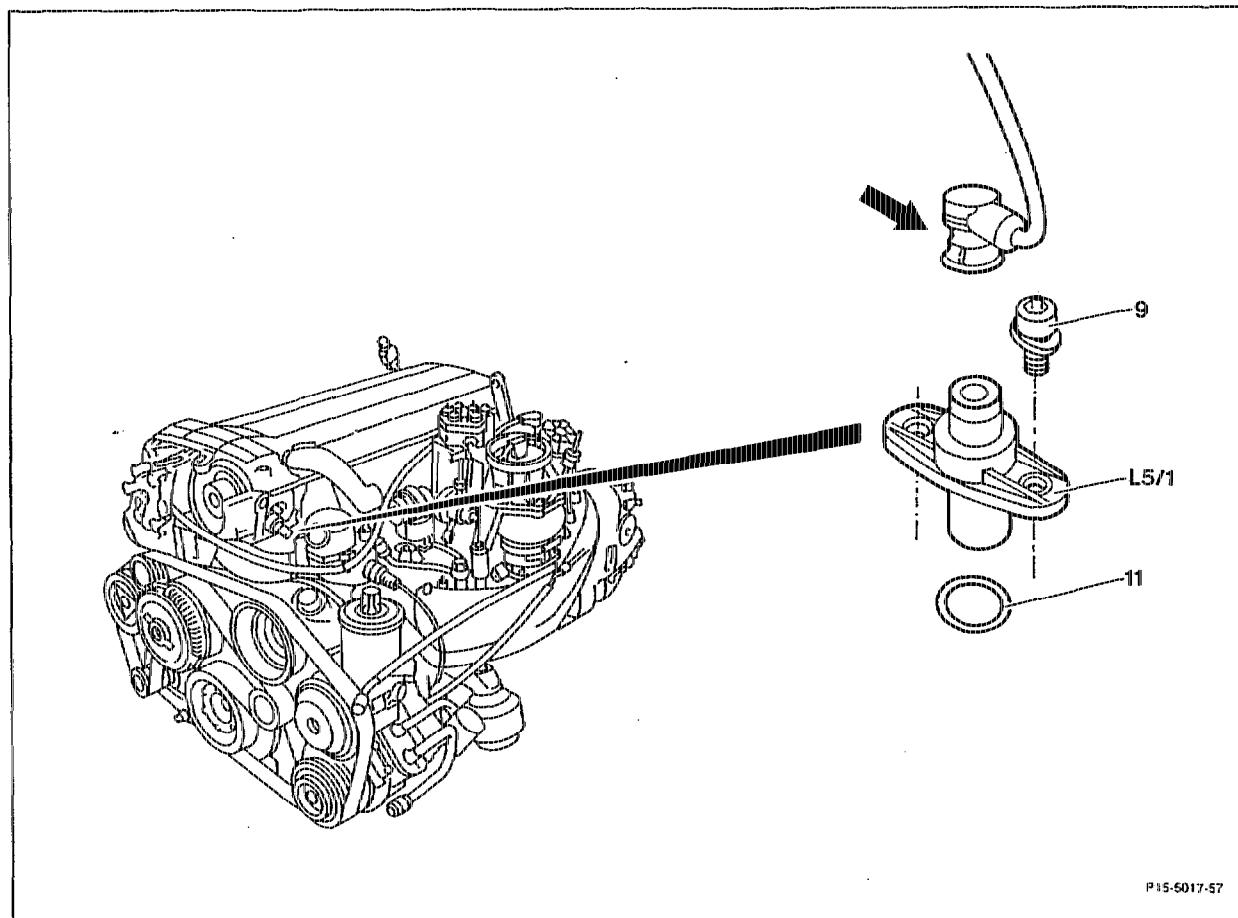

P15-5017-57

- |   |  |
|---|--|
| Connector of camshaft position sensor (arrow) . . . | unplug, plug in.   |
| Screws (9) . . . . .                                | unscrew, screw in.<br><br>Tightening torque 10 Nm as reference value.          |
| Camshaft position sensor (L5/1) . . . . .           | unplug, plug in.   |
| O-ring (11) . . . . .                               | replace.   |
| CIS-E control unit fault memory . . . . .           | read out, erase if necessary (see Diagnosis Manual Engine, Volume 2, Index 0). |

### Note

Stored faults which may originate from test work resulting from cables being disconnected or from a simulation, must be erased in the fault memory after completing the work.