


88-802 Removal and installation of protective strip on side wall

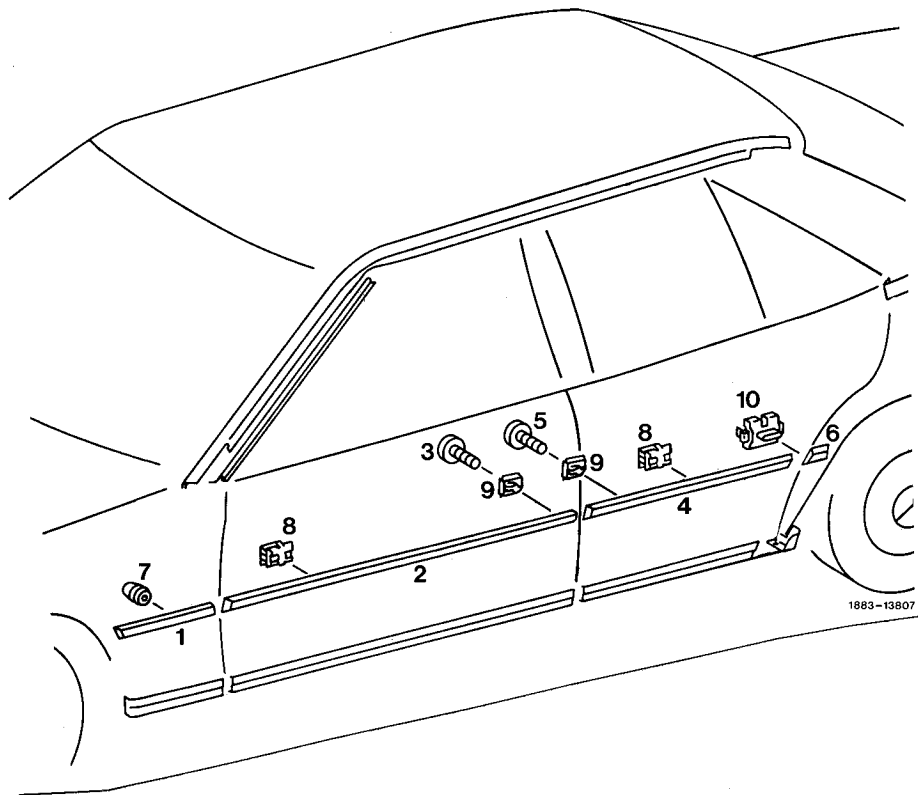

Protective strip (1) on front fender	press off with plastic wedge from below, renew dowel (7), if required, press on
Screw (3) on driver's door rebate	unscrew, screw in
Protective strip (2)	pull off toward the rear, renew clip (8), dowel (9), if required
Screw (5) on rear door rebate	unscrew, screw in
Protective strip (4)	push forward and remove, renew clip (8) and dowel (9), if required
Protective strip (6) on wheelhouse	press off with plastic wedge, renew clip (10), if required, press on